


X10338

HALF WAVE VIBRATOR CONTROLLER | SINGLE PHASE

UV15/D

110v, 230v

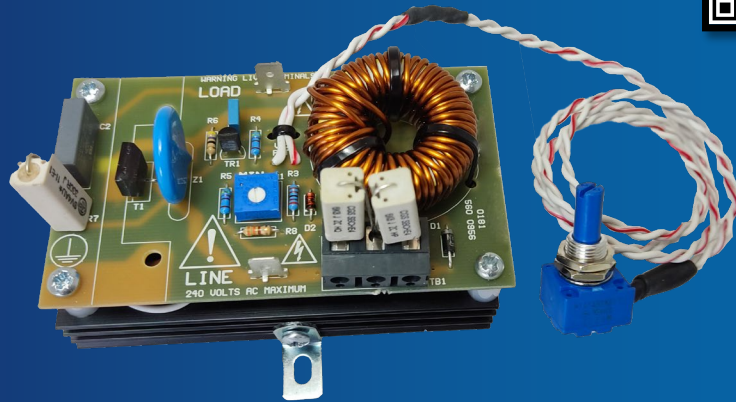

CONTACT US:

☎ 0044 (0) 1704-516 501

✉ enquiries@united-automation.com

🌐 www.united-automation.com

KEY FEATURES:

- ✓ **Solid-State Reliability:** Ensures long-lasting, dependable performance.
- ✓ **Dual Voltage Compatibility:** Operates on both 110V and 240V AC supplies.
- ✓ **Simple Wiring:** Easy installation with minimal wiring requirements.
- ✓ **Adjustable Minimum Output:** Fine-tune the minimum output for precise control.
- ✓ **Energy Saving:** Designed to optimise energy consumption.

APPLICATIONS:

Ideal for controlling **vibrator coils**, the UV15/D is a versatile solution for applications requiring efficient, reliable power management.

The **UV15/D** is a robust single-phase half-wave controller designed for seamless operation on both 110V and 240V AC supplies. Featuring an integral high-current device, it ensures reliable performance across a range of applications. With a straightforward 2-wire connection plus Earth, installation is quick and easy. The output can be precisely adjusted using a 25K potentiometer, with a cermet mounted on the PCB for fine-tuning minimum settings.

The **UV15/D** is an efficient, easy-to-use controller that provides solid-state reliability and energy savings in a compact, dual-voltage design.

TECHNICAL SPECIFICATIONS

Supply	110 or 230Vac ± 10% @50/60hz
Unit RMS Current Rating	15A
Peak Single Cycle Surge Current	500A
Thyristor Limiting RMS Current	50A
L²t for Fusing	112A ² s
Maximum Peak Voltage	1000V
Minimum Operating Current	200mA
Storage Temperature Range	0-85°C
Operating Temperature	0-65°C



united automation

BMF House - Wight Moss Way,
Southport Business Park
Southport PR8 4HQ
ENGLAND


unitedautomationltd UA_Limited




UV15/D

110v, 230v

INSTALLATION

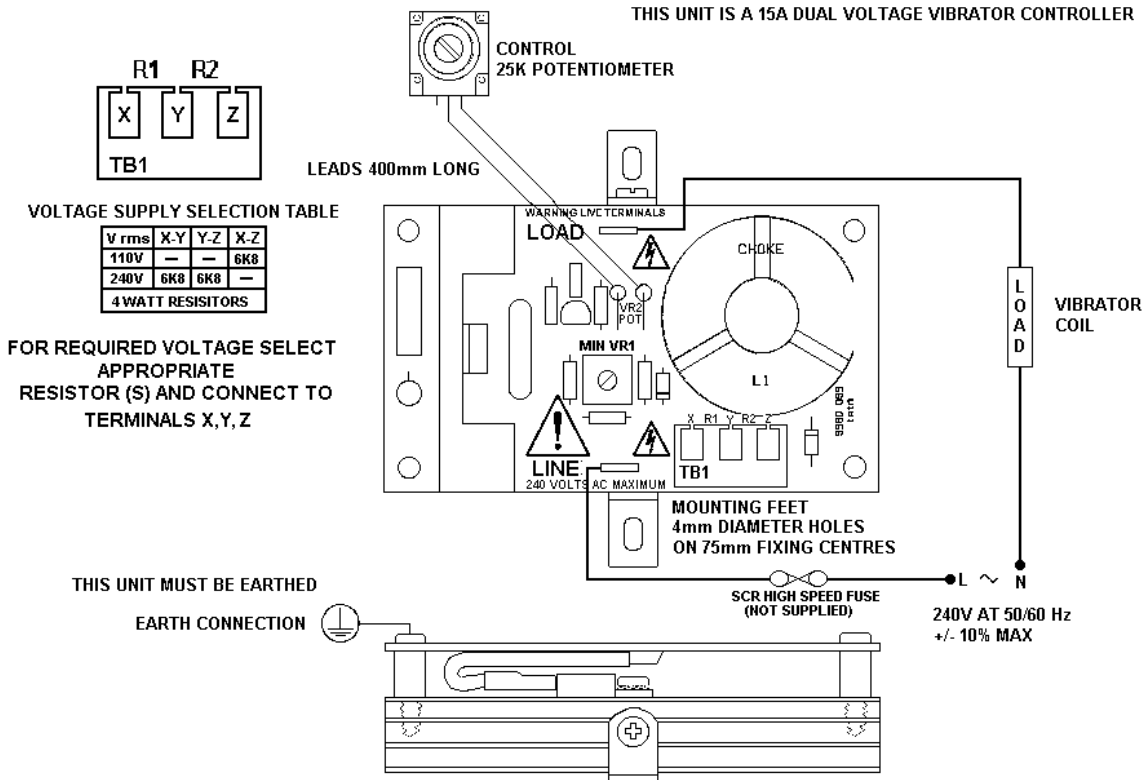

WARNING: ISOLATE FROM MAINS SUPPLY BEFORE COMMENCING ANY SERVICE WORK. (SEE SRA AND ITA DATA SHEETS)
 NOTE: REMOTE POTENTIOMETER LEADS ARE AT HAZARDOUS LIVE POTENTIAL AND OTHER COMPONENTS ARE, OR IN FAULT CONDITIONS MAY BECOME HAZARDOUS LIVE.

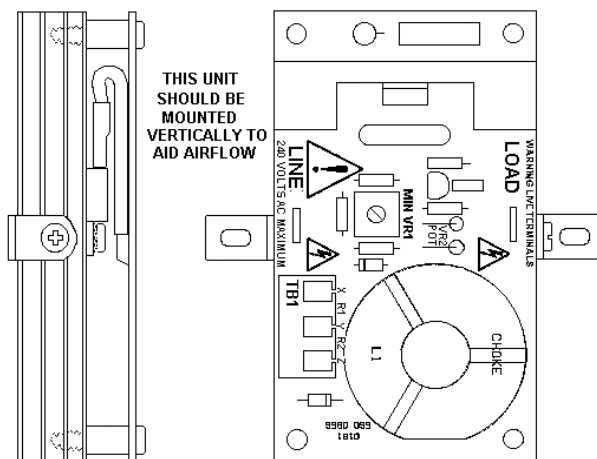

BMF House - Wight Moss Way,
 Southport Business Park
 Southport PR8 4HQ
 ENGLAND

UV15/D

110v, 230v

RECOMMENDATIONS

FUSING

It is recommended to use semiconductor (fast acting) type fuses or circuit breakers (Semiconductor - MCB) for unit protection. On initial 'switch on' some loads may need an increased factor of safety (F of S) for unit and/or device protection. (See SRA Datasheet for further information).

CE Marking

This product family carries a "CE" marking. These burst firing type controllers do not require a filter. For information see recommendation section and contact our sales desk. See the Declaration of Conformity.

DOCUMENTS

Other documents available on request, which may be appropriate for your application:

Code	Identity	Description
X10229	RFI	Filtering Recommendations: Addressing the EMC Directive
X10213	ITA	Interaction: Uses for phase angle and for burst fire control
X10255	SRA	Safety Requirements: Addressing the Low Voltage Directive (LVD) including, Thermal Data/Cooling, Live Parts Warning, Earthing Requirements and Fusing Recommendations
P01.1	COS	UAL Conditions of Sale

It is recommended that installation and maintenance of this equipment should be done with reference to the current edition of the I.E.T. regulations (BS7671) by suitably qualified/trained personnel. The regulations contain important requirements regarding the safety of electrical equipment. For International standards refer STANDARDS on D of C.

PRODUCT CODE AND RELATED PRODUCT CODE

Product Code	Product Description
A52415	UV15/D



BMF House - Wight Moss Way,
Southport Business Park
Southport PR8 4HQ
ENGLAND

