

X10380

Fan Speed Controllers

VAC1/RFI & VAC2/RFI

Up to 3A, 110v, 230v
Single Phase Fan Controller

CONTACT US:

☎ 0044 (0) 1704-516 501

✉ enquiries@united-automation.com

🌐 www.united-automation.com



KEY FEATURES:

- ✓ Infinitely adjustable output from **0-98%**.
- ✓ **Minimum Set Speed Adjuster** to prevent slow motor operation.
- ✓ **Triac inrush protection** for safe high-current handling.
- ✓ **Integral RC Snubber** for smooth inductive load control.
- ✓ Built-in **EMC filtering** for compliance with emission standards.
- ✓ **Rugged, compact** design with single hole fixing for easy installation.

APPLICATIONS:

These controllers are ideal for managing **HVAC systems, ventilation setups, and motor-driven applications**, providing energy-efficient, precise control of simple mains-driven motors and fans.

The **VAC2-1/RFI**, **VAC2-3/RFI**, and **VAC1-1/RFI** single-phase fan controllers are compact, variable phase angle regulators designed for precise control of motors, fans, and pumps in industrial and commercial environments.

Operating at **230V** for the **VAC2** models and **110V** for the **VAC1**, these controllers offer **0-98% adjustable voltage output**, ensuring smooth, reliable operation.

With robust **Triac inrush protection, RC Snubber technology, and EMC compliance**, they handle high inrush currents while meeting modern standards for electrical noise suppression.

TECHNICAL SPECIFICATIONS

	VAC1-1/RFI	VAC2-1/RFI	VAC2-3/RFI
Maximum RMS on-state current	1A	1A	3A
Peak one cycle surge @ 10mS	80A	80A	150A
I ² t for fusing	36 A ² s	36 A ² s	100 A ² s
Minimum operating current	100mA		
Isolation voltage	2500V rms		
Maximum recommended unit temperature	70°C		
Mains supply +/-10% @ 50/60Hz	110V ac	230V ac	230V ac
Output Range	0-98%		
Minimum Set Speed Range	0-98%		



united automation

BMF House - Wight Moss Way,
Southport Business Park
Southport PR8 4HQ
ENGLAND

unitedautomationltd UA_Limited




VAC1/RFI & VAC2/RFI

Up to 3A, 110v, 230v Single Phase Fan Controller

INSTALLATION

DIMENSIONS & CONNECTIONS


➤ VAC1-1 RFI & VAC2-1 RFI

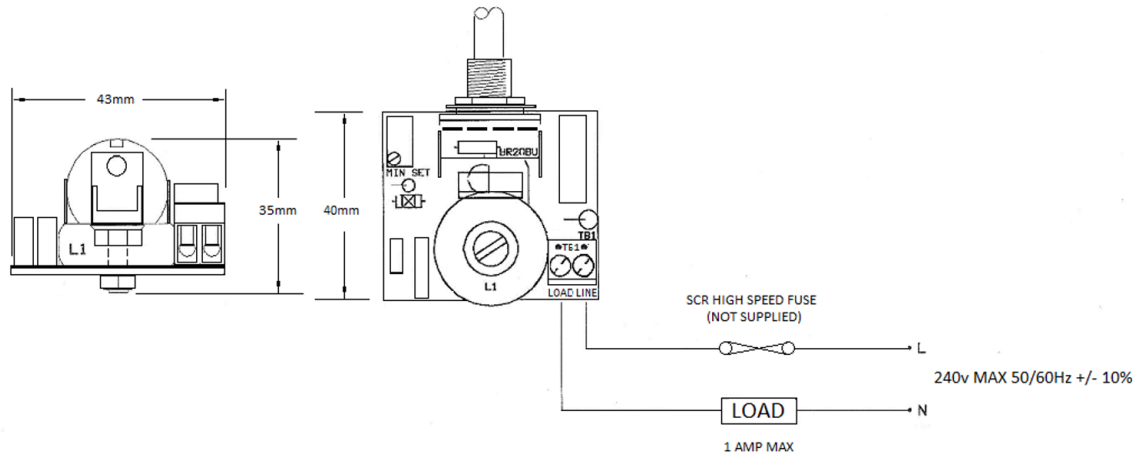

WARNING

DISCONNECT FROM SUPPLY BEFORE CARRYING OUT ANY SERVICING WORK

➤ VAC2-3/RFI

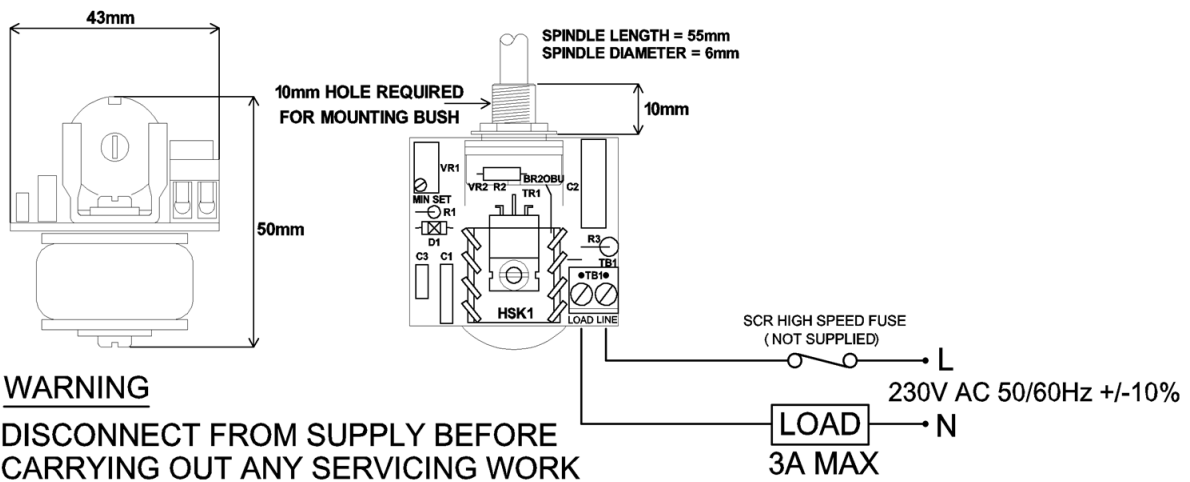

WARNING

DISCONNECT FROM SUPPLY BEFORE CARRYING OUT ANY SERVICING WORK



BMF House - Wight Moss Way,
Southport Business Park
Southport PR8 4HQ
ENGLAND

united automation

unitedautomationltd UA_Limited



VAC1/RFI & VAC2/RFI

Up to 3A, 110v, 230v Single Phase Fan Controller

RECOMMENDATIONS

FUSING

It is recommended to use semiconductor (fast acting) type fuses or circuit breakers (Semiconductor - MCB) for unit protection. On initial 'switch on' some loads may need an increased Factor of Safety (F of S) for unit and/or device protection. (See the SRA Datasheet for further information).

DOCUMENTS

Other documents available on request, which may be appropriate for your application:

Code	Identity	Description
X10229	RFI	Filtering Recommendations: Addressing the EMC Directive
X10213	ITA	Interaction: Uses for phase angle and for burst fire control
X10255	SRA	Safety Requirements: Addressing the Low Voltage Directive (LVD) including Thermal Data/Cooling, Live Parts Warning, Earthing Requirements and Fusing Recommendations
P01.1	COS	UAL Conditions of Sale

It is recommended that installation and maintenance of this equipment should be done with reference to the current edition of the I.E.T. regulations (BS7671) by suitably qualified/trained personnel. The regulations contain important requirements regarding the safety of electrical equipment. For International standards refer STANDARDS on D of C.

PRODUCT CODE AND RELATED PRODUCT CODE

Product Code	Product Description
A71105	VAC1-1/RFI 1A, 110v Fan control with RFI
A72102	VAC2-1/RFI 1A, 230v Fan control with RFI
A72105	VAC2-1/RFI High Surge, 1A, 230v Fan control with RFI
A72301	VAC2-3/RFI 3A, 230v Fan control with RFI



BMF House - Wight Moss Way,
Southport Business Park
Southport PR8 4HQ
ENGLAND

united automation

[@](#) [f](#) [in](#) [d](#) unitedautomationltd [x](#) UA_Limited

