

X10858

Components and Spares | 3 Phase Fuse Monitoring Module



Fuse Monitor with Alarm output

2 Phase or 3 Phase option
Fuse Monitoring Module (3 Leg) N/C Alarm

CONTACT US:

☎ 0044 (0) 1704-516 501

✉ enquiries@united-automation.com

🌐 www.united-automation.com



KEY FEATURES:

- ✓ Individual Phase LED for each fuse
- ✓ Power ON LED for system status
- ✓ Resettable Alarm output
- ✓ Simple DIN rail mounting
- ✓ 5V DC low-voltage operation

APPLICATIONS:

This unit has been designed to identify and provide an alarm output when a fuse fails. Offering 2 channel or 3 channels versions for 2/3 option or full 3 phase systems.

The **Fuse Fail Indicator** is a reliable DIN rail-mounted fuse monitor designed to promptly identify fuse failures in various applications, minimising downtime and enhancing operational efficiency.

Operating on a low 5V DC supply, it features a **Green Power LED** to confirm power status and **three RED LEDs** that illuminate to indicate specific fuse failures.

An alarm output is activated upon detection of a blown fuse, which resets once the unit is power cycled, eliminating the need for component replacement.


An alarm output is also activated in the event that the unit loses power – alerting the user.

Ideal for two or three-phase systems, this indicator offers precise, low-maintenance monitoring.

TECHNICAL SPECIFICATIONS

Supply	5VDC
Alarm Relay	Normal Closed or Normally Open
Current Consumption	No Fault – 46mA
	1 Phase Fault – 8mA
	2 Phase Fault – 12mA
Mounting	DIN RAIL
	(94 x 73 x 46) mm

INSTALLATION & CONNECTIONS

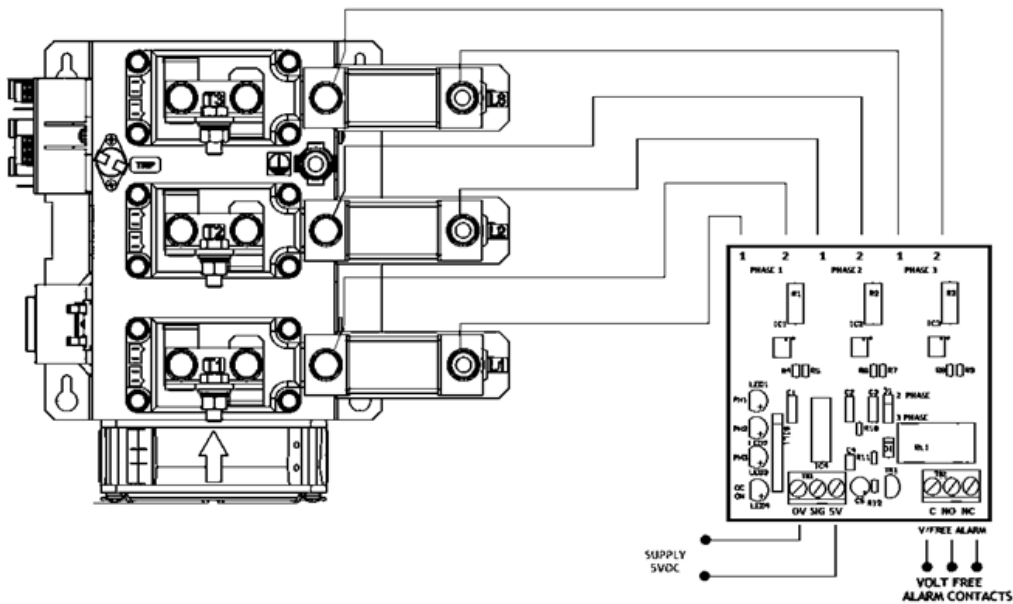

BMF House - Wight Moss Way,
Southport Business Park
Southport PR8 4HQ
ENGLAND

united automation unitedautomationltd UA_Limited




Fuse Monitor with Alarm output

2 Phase or 3 Phase option

Fuse Monitoring Module (3 Leg) N/C Alarm

DIMENSIONS

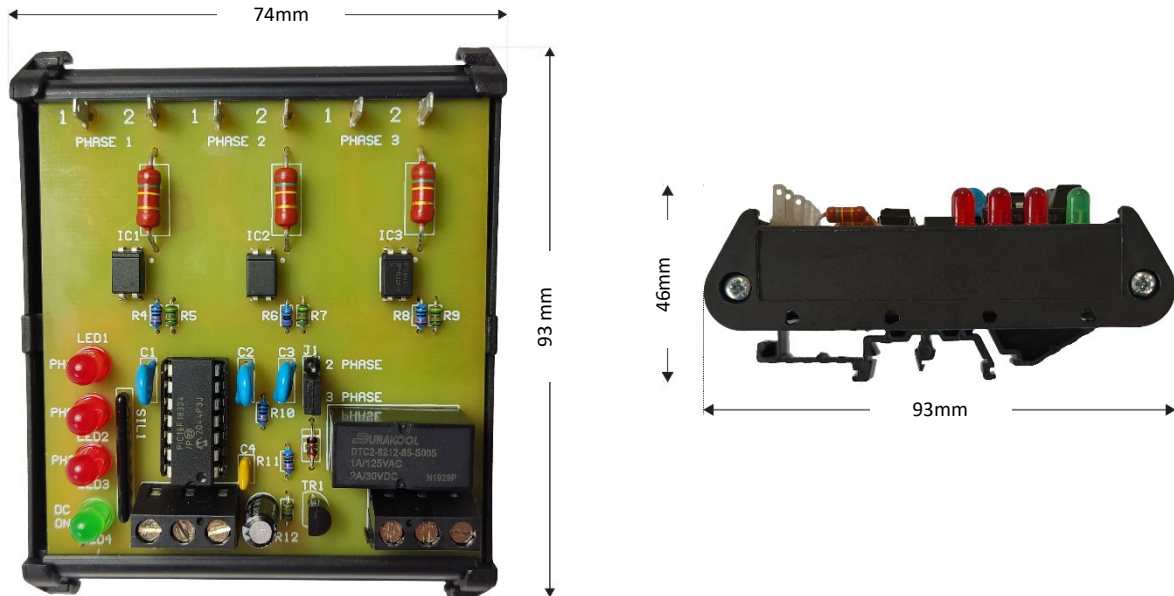

DOCUMENTS

Other documents available on request, which may be appropriate for your application:

Code	Identity	Description
P01.1	COS	UAL Conditions of Sale

It is recommended that installation and maintenance of this equipment should be done with reference to the current edition of the I.E.T. regulations (BS7671) by suitably qualified/trained personnel. The regulations contain important requirements regarding the safety of electrical equipment. For International standards refer STANDARDS on D of C.

PRODUCT CODE AND RELATED PRODUCT CODE

Product Code	Product Description
A403138	Fuse Monitoring Module (3 Leg) N/C Alarm



BMF House - Wight Moss Way,
Southport Business Park
Southport PR8 4HQ
ENGLAND

united automation

unitedautomationltd

 UA_Limited

