

X10839

Power Line Filter – EMI Filter

# EN 2060 Series

Dual-Stage High Performance  
AC/DC EMI Filters

## CONTACT US:

☎ 0044 (0) 1704-516 501

✉ enquiries@united-automation.com

🌐 www.united-automation.com



### KEY FEATURES:

- ✓ Dual-stage filtering for enhanced RFI/EMI attenuation
- ✓ Rated for 1A to 20A at 250VAC
- ✓ High differential mode performance
- ✓ Type B (medical) and Type A (low leakage) options
- ✓ -25°C to +100°C operating range
- ✓ Certified to UL 1283, EN60939 standards
- ✓ Versatile for both AC and DC applications
- ✓ Supports medical, automation, and industrial equipment
- ✓ Available as EN 2010 (single-stage) for alternative needs

### APPLICATIONS:

- Medical equipment (Type B – Y-capacitor free)
- Industrial machinery & building automation
- Office & datacom electronics
- Consumer electronics and vending machines
- Electronic data processing systems


The **EN 2060 Series** offers reliable, dual-stage **AC/DC EMI filters** designed for a wide range of electronic and industrial applications. These filters deliver strong **differential mode and common mode attenuation**, making them ideal for systems requiring high EMC performance and noise suppression.

Available in multiple configurations—including **standard**, **low leakage (Type A)**, and **medical-grade (Type B)**—the EN 2060 filters are also offered with varied terminal types for simplified **chassis mounting**. With **rated currents from 1A to 20A**, the series provides excellent current-to-size efficiency, thermal stability, and high voltage insulation.


### TECHNICAL SPECIFICATIONS

Maximum continuous operating voltage	250VAC, 50/60Hz
Operating Frequency	DC to 400Hz
Rated Currents	1 to 20A @40°C
High Potential Test voltage	L-GND 2550 VDC for 2 sec L-GND 3500 VDC for 2 sec (B types) L - N 1100 VDC for 2 sec
Temperature range (operation and storage)	-25°C to +100°C (25/100/21)
Certified to	UL 1283, EC/EN60939 (Applies to AC and DC Applications)
Flammability Corresponding to	UL 94V-2 better

### Electrical Schematic

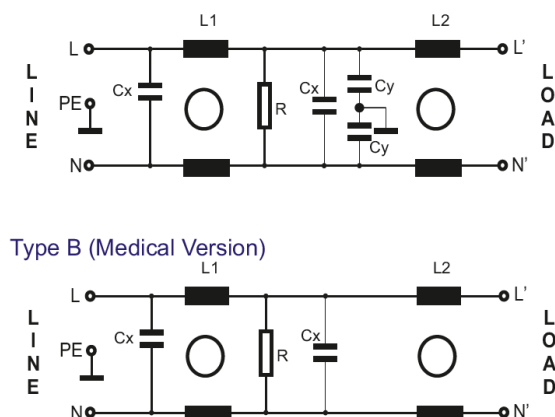

Temperature Derating Curve for EMC Filters Rated at 40°C Ambient and 100°C Maximum

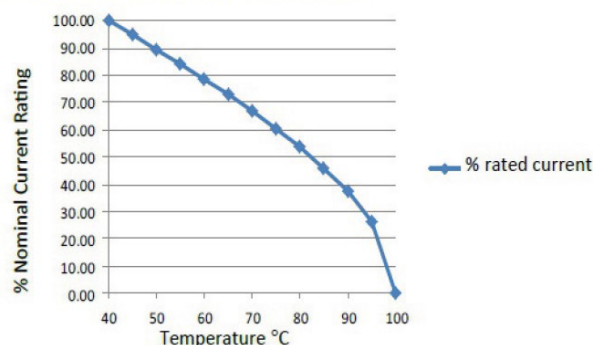




### YOU MUST READ THIS BEFORE INSTALLATION

ELECTRICAL SAFETY	INSTALLATION REQUIREMENTS	USER RESTRICTIONS	USAGE ENVIRONMENT	HOT SURFACE WARNING
<b>WARNING: RISK OF ELECTRIC SHOCK</b> Always consult the Installation & Maintenance Instructions before connecting this product to the power supply. <b>WARNING: Disconnect Power Before Servicing</b> Ensure the electrical supply is safely disconnected before connecting to any supply, load, or control terminals.	<b>WARNING: Installation by Qualified Personnel Only</b> This product must only be installed or fitted by a competent, qualified installer familiar with the relevant electrical standards and installation practices.	<b>WARNING: Not for Use by Vulnerable Individuals</b> This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they are supervised or instructed by a person responsible for their safety.	<b>WARNING: Industrial Use Only</b> This is an industrial-grade product and is not intended for household use.	<b>WARNING: Hot Surfaces</b> On certain models, surfaces marked with this symbol become hot during use. Avoid direct contact and follow all thermal safety precautions.

# EN 2060 Series

## AC/DC EMI Filters

### FILTER SELECTION TABLE


Filters**	Rated current @40°C (25°C) A	Leakage current @250V 50Hz mA	Inductance (L-L) $\Sigma L$ mH	Capacitance (L-N) $\Sigma Cx$ $\mu F$	Capacitance (L-G) $\Sigma Cy$ nF	Resistance (L-N) $\Sigma R$ K $\Omega$	Connection type			Weight gram (g)
										
EN2060-1-X	1(1.15)	0.66	24	0.44	9.4	1000	F	W		120
EN2060-3-X	3(3.45)	0.66	5	0.44	9.4	1000	F	W		120
EN2060-6-X	6(6.90)	0.66	1.94	0.44	9.4	1000	F	W		120
EN2060-10-X	10(11.5)	0.66	1.6	0.94	9.4	470	F	W		210
EN2060-12-X	12(13.8)	0.66	1.16	0.94	9.4	470	F	W		210
EN2060-16-X	16(18.4)	0.66	1.3	0.66	9.4	1000	F	W	S	250
EN2060-20-X	20(23.0)	0.66	1.2	2	9.4	220	F		S	480
<b>Low Leakage Version</b>										
EN2060A-1-X	1(1.15)	0.07	24	0.44	0.94	1000	F	W		120
EN2060A-3-X	3(3.45)	0.07	5	0.44	0.94	1000	F	W		120
EN2060A-6-X	6(6.90)	0.07	1.94	0.44	0.94	1000	F	W		120
EN2060A-10-X	10(11.5)	0.07	1.6	0.94	0.94	470	F	W		210
EN2060A-12-X	12(13.8)	0.07	1.16	0.94	0.94	470	F	W		210
EN2060A-16-X	16(18.4)	0.07	1.3	0.66	0.94	1000	F	W	S	250
EN2060A-20-X	20(23.0)	0.07	1.2	2	0.94	220	F		S	480
<b>Medical Version Without Y cap</b>										
EN2060B-1-X	1(1.15)	0.002	24	0.44		1000	F	W		120
EN2060B-3-X	3(3.45)	0.002	5	0.44		1000	F	W		120
EN2060B-6-X	6(6.90)	0.002	1.94	0.44		1000	F	W		120
EN2060B-10-X	10(11.5)	0.002	1.6	0.94		470	F	W		210
EN2060B-12-X	13(00.0)	0.002	1.16	0.94		470	F	W		210
EN2060B-16-X	16(18.4)	0.002	1.3	0.66		1000	F	W	S	250
EN2060B-20-X	20(23.0)	0.002	1.2	2		220	F		S	480

To compile a complete part number, please replace the -- with the required I/O connection style (e.g. EN 2060-16-S, EN 2060B-10-F). The different letters code the \*\* Maximum leakage under usual AC operating conditions (acc. IEC 60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.


### TYPICAL INSERTION LOSS, dB (50/50 Ohm)

Insertion Loss: Common mode - —  
Differential mode - —


#### 1 to 3 A

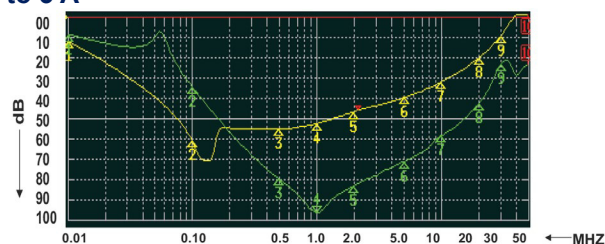


#### 6 to 10 A

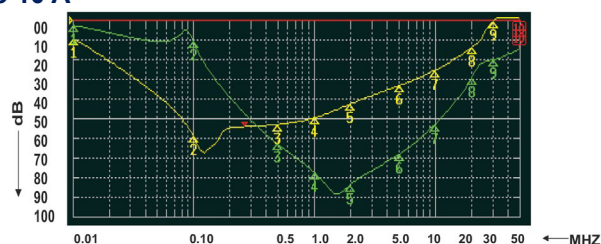

#### 12 to 16 A

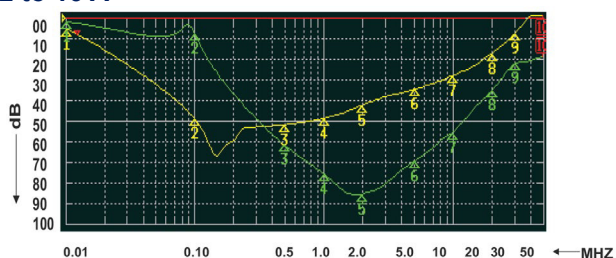

#### 20 to 30 A

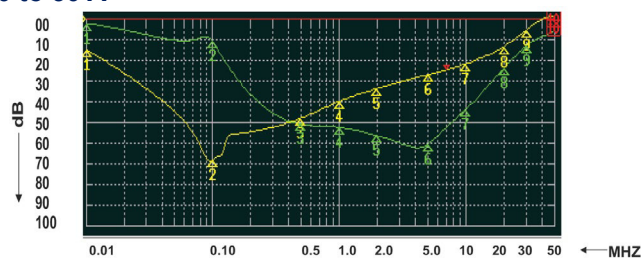



# EN 2060 Series

## AC/DC EMI Filters

### RECOMMENDATIONS

#### FUSING

It is recommended to use semiconductor (fast acting) type fuses or circuit breakers (Semiconductor - MCB) for unit protection. On initial switch on some loads may need an increased Factor of Safety (F of S) for unit and/or device protection. See SRA datasheet for information.

### DOCUMENTS

Other documents available on request, which may be appropriate for your application:

Code	Identity	Description
X10229	RFI	Filter recommendations: Addressing the EMC Directive
X10213	ITA	Interaction: Uses for phase angle and for burst fire control
X10255	SRA	Safety Requirements: Addressing the Low Voltage Directive (LVD) including, Thermal Data/Cooling, Live Parts Warning, Earthing Requirements and Fusing Recommendations

It is recommended that installation and maintenance of this equipment should be done with reference to the current edition of the I.E.T. regulations (BS7671) by suitably qualified/trained personnel. The regulations contain important requirements regarding the safety of electrical equipment. For International standards refer STANDARDS on D of C.

### PRODUCT CODE AND RELATED PRODUCT CODE

Product Code	Product Description
A-EN2060-16-F	Single phase Chassis Mount EMI/RFI filter 60 series, 16A, Fast On



# FILTERS RECOMMENDATIONS

Contact Us: ☎ 0044 (0) 1704-516 501 ✉ enquiries@united-automation.com 🌐 www.united-automation.com



## APPLICATION AND BASIC DIFFERENCE OF ALL EN20XX SERIES

Sn	Series	Type	Rated Current (A)	Stage	Performance	Circuit details	Application	Medical Version	Low Leakage	Surge Protection
1	EN2010	Single Phase	1, 3, 6, 10, 12, 13, 16, 20, 30	Single	General Attenuation		General Purpose Application, Household equipment, medical equipment office automation & Electrical and Electronics equipment	Available	Available	
2	EN2020	Single Phase	1, 3, 6, 10, 12, 16, 20, 30	Single	High differential Mode Attenuation		General Purpose Application, Household equipment, medical Equipment office automation, datacom application & Electrical and Electronics equipment	Available	Available	
3	EN2030	Single Phase	1, 3, 4, 6, 8, 10, 12, 16, 20, 30	Single	High differential Mode Attenuation		General Purpose Applications, Household equipment, medical Equipment office automation & Electrical and Electronics equipment, high noise application	Available	Available	**Available, 2KV IEC 61000-4-5
4	EN2060	Single Phase	1, 3, 6, 10, 12, 16, 20, 30	Dual	High differential & Common Mode attenuation		Industrial Applications, Building Automation, Household equipment, medical equipment office automation, Electronics data processing equipment & Various Noisy applications, Motor drives and applications.	Available	Available	
5	EN2070	Single Phase	1, 3, 6, 10, 12, 16, 25, 36	Dual	High differential & Common Mode attenuation		Industrial Applications, Building Automation, Household equipment, Medical Equipment office automation, Electronics data processing equipment & Various Noisy applications, Motor drives and applications.	Available	Available	
6	EN2080	Single Phase	1, 3, 6, 10, 12, 16	Dual	High differential & Common Mode attenuation		Industrial Applications, Building Automation, Household equipment, medical equipment, office automation, Electronics data processing equipment & Various Noisy applications, Motor drives and applications.	Available	Available	
7	EN2090	Single Phase	1, 3, 4, 6, 8, 10, 12, 16, 20, 30	Dual	Very high differential & Common Mode attenuation		Industrial applications, Building Automation, Household equipment, Medical Equipment, office automation, Electronics data processing equipment & Various Noisy applications, Motor drives and applications.	Available	Available	**Available, 2KV IEC 61000-4-5

Note: \*\* Surge protection Filter is only CE and ROHS Approved



BMF House - Wight Moss Way,  
Southport Business Park  
Southport PR8 4HQ  
ENGLAND

unitedautomationltd UA\_Limited

