




Wall Mounted Patio Heater (remote control/dimmable)

2000W, 240V
Customisable Infrared Heating with Dimmable Remote

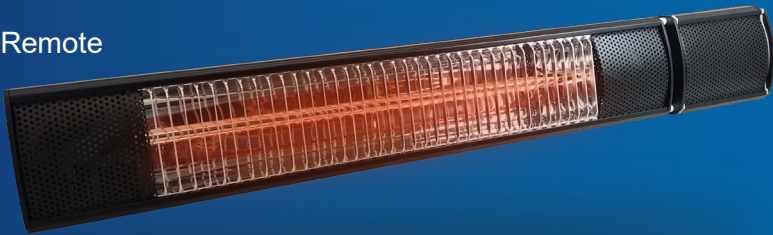

CONTACT US:
☎ 0044 (0) 1704-516 501
✉ enquiries@united-automation.com
🌐 www.united-automation.com

- KEY FEATURES:**
- ✓ **Easy to Install:** Wall-mounted design with all necessary hardware included for straightforward setup.
 - ✓ **Customisable Heating:** Dimmable remote control with 1000W, 1500W, and 2000W settings for tailored heat output.
 - ✓ **Durable Construction:** High-quality aluminium body ensures longevity and robust performance.
 - ✓ **Weatherproof Design:** IPX5 rating protects against rain and snow, making it perfect for outdoor use.
 - ✓ **Efficient Heat Distribution:** Gold lamp infrared heating element provides quick and even heat with a long lifespan of 5000 hours.
 - ✓ **Safe Operation:** Integrated safety features including automatic shut-off in case of overheating or tipping.

APPLICATIONS:

Perfect for enhancing the ambience of:

- Patio areas
- Smoking shelters
- Restaurants
- Warehouses
- Workshops
- Outside

This wall-mounted patio heater brings warmth and versatility to any outdoor setting.

Enhance your outdoor comfort with the Wall Mounted Patio Heater 2kW. Powered by a robust 2000W gold lamp infrared heating element, this heater delivers optimal warmth to your outdoor area.

Featuring a single heating element, it ensures efficient heating and an extended lamp life of up to 5000 hours. The included dimmable remote controller allows you to customise heat levels with settings at **1000W, 1500W, and 2000W** to suit your preferences.

Experience the benefits of efficient and customisable outdoor heating with the Wall Mounted Patio Heater 2kW.

Order yours today and enjoy a warm, cosy **outdoor space** year-round.

TECHNICAL SPECIFICATIONS

Input Voltage	220-240V	
Frequency	50/60 Hz	
Power	2000W	
Heating Element	Gold Lamp (Infrared)	
Life Expectancy of Heating Lamp	5000 hours	
IP Rating	IPX5	
Product Class	I	
Legal Certificate Standards	CE/ROHS	
Body Material Type	Aluminium	
Cable Type	H07RN-F 3X1.5MM	
Conductor Size	1.5mm ²	
Cable Length	1.9M	
Hanging / Mounting Bracket	Wall-Mounted Bracket	
Dimensions	65.5cm x 10cm x 8cm	
Weight	2.65kg	
Temperature Test Report		
Ambient Temperature	14.3 °C	/
Test point (2000W mesh cover surface)	423.4 °C	409.1 °C



Warning:
The lamp **MUST** be installed in a **horizontal orientation**.
Never install it vertically, as this may lead to **overheating or damage**.
(For more information, please refer to the user manual included in the box.)

YOU MUST READ THIS BEFORE INSTALLATION

ELECTRICAL SAFETY WARNING: RISK OF ELECTRIC SHOCK Always consult the Installation & Maintenance Instructions before connecting this product to the power supply. WARNING: Disconnect Power Before Servicing Ensure the electrical supply is safely disconnected before connecting to any supply, load, or control terminals.	INSTALLATION REQUIREMENTS WARNING: Installation by Qualified Personnel Only This product must only be installed or fitted by a competent, qualified installer familiar with the relevant electrical standards and installation practices.	USER RESTRICTIONS WARNING: Not for Use by Vulnerable Individuals This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they are supervised or instructed by a person responsible for their safety.	USAGE ENVIRONMENT WARNING: Industrial Use Only This is an industrial-grade product and is not intended for household use.	HOT SURFACE WARNING WARNING: Hot Surfaces On certain models, surfaces marked with this symbol become hot during use. Avoid direct contact and follow all thermal safety precautions.
---	---	--	---	--

Wall Mounted Patio Heater

2000W, 240V

Customisable Infrared Heating with Dimmable Remote Control

INSTALLATION

It comes with a wall-mounted bracket for a simple setup and includes a 1.9-meter power cord for convenient plug-in to any standard UK socket.

The heater is fitted with a supply cable and moulded plug, therefore the terminals should not be interfered with.

The following points should be considered when positioning the heater:

- Please observe the minimum safe distance between the heater body and any inflammable surfaces.
- **DO NOT** position the heater at an angle of more than 70° from the rear wall (See Fig.1).
- If in any doubt, please contact a suitably qualified electrician.
- **Keep out of the reach of children.**
- **DO NOT** position this heater near furniture or curtains, as this could present a fire hazard.
- The heater must not be located below a socket-outlet.

1. Securely fasten the bracket to the mounting surface using the fixing in the bracket.

2. Fix in the required angular position by tightening the fixing bolt on the bracket at the rear of the heater.

3. The bracket can be used to adjust the direction of the heater up and down (See Fig.2).

This is done by loosening the bolts fixing the heater to the bracket, and then retightening once the correct position is achieved. Always isolate the heater from the mains supply when adjusting the angular position.

DO NOT touch the lamp bulb, as it may get damaged or have a shorter lifespan.

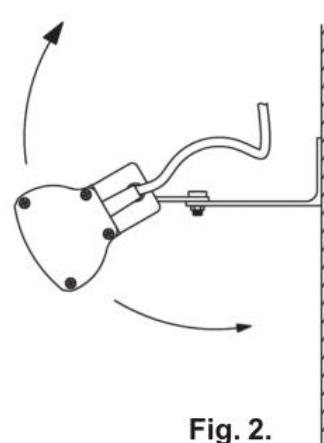
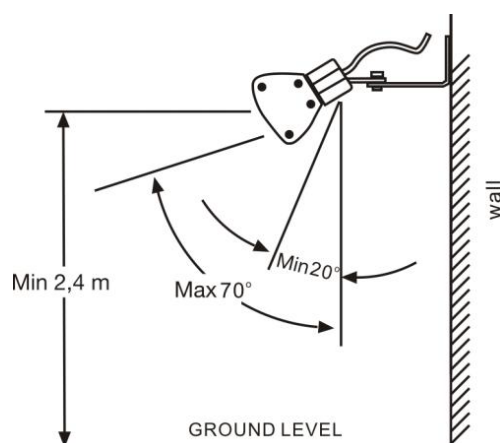


Fig. 2.

(For more information, please refer to the user manual included in the box.)

- In the event of heater failure, or for spare parts or advice, please contact the manufacture in the first instance.
- Disconnect from the mains before commencing any maintenance procedure including cleaning.
- To ensure optimum heat effectiveness, it is recommended that after the heater has been used for approximately 80-100 hours, that the guard and lamp are removed and the reflector is wiped with a lint-free cloth before reassembling.
- If the supply cord becomes damaged, it must be replaced by the manufacturer, its service agent or a similar qualified person.

LEGAL CERTIFICATE STANDARDS

The product is CE & ROHS marked, ensuring it meets European safety, health, and environmental protection standards.

RECOMMENDATIONS

NOTE: It is recommended that installation and maintenance of this equipment should be done with reference to the current edition of the I.E.T. (formally I.E.E.) regulations (BS7671) by suitably qualified/trained personnel. The regulations contain important requirements regarding the installation and safety of electrical equipment. Specific installers should refer to local and national regulations.

PRODUCT CODE AND RELATED PRODUCT CODE

Product Code	Product Description
A-HL-E72C-R2-RM1-B	Wall Mounted 2000W Infrared Patio Heater (remote control/dimmable)



BMF House - Wight Moss Way,
Southport Business Park
Southport PR8 4HQ
ENGLAND, UNITED KINGDOM

Contact Us:

☎ 0044 (0) 1704-516 501
✉ enquiries@united-automation.com
🌐 www.united-automation.com

