

VAC1/RFI & VAC2/RFI

Up to 3A, 110V, 230V
Single Phase Fan Controller

CONTACT US:

☎ 0044 (0) 1704-516 501

✉ enquiries@united-automation.com

🌐 www.united-automation.com



KEY FEATURES:

- ✓ Infinitely adjustable output from **0-98%**.
- ✓ **Minimum Set Speed Adjuster** to prevent slow motor operation.
- ✓ **Triac inrush protection** for safe high-current handling.
- ✓ **Integral RC Snubber** for smooth inductive load control.
- ✓ Built-in **EMC filtering** for compliance with emission standards.
- ✓ **Rugged, compact** design with single hole fixing for easy installation.


APPLICATIONS:

These controllers are ideal for managing **HVAC systems, ventilation setups, and motor-driven applications**, providing energy-efficient, precise control of simple mains-driven motors and fans.

INSTALLATION

DIMENSIONS & CONNECTIONS

➤ VAC1-1 RFI & VAC2-1 RFI

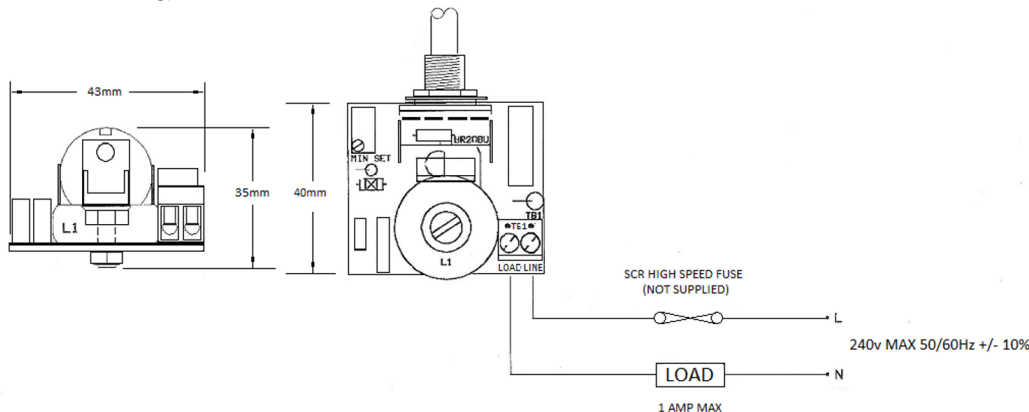

⚠ WARNING!
DISCONNECT
FROM SUPPLY
BEFORE
CARRYING OUT
ANY SERVICING
WORK

The **VAC2-1/RFI**, **VAC2-3/RFI**, and **VAC1-1/RFI** single-phase fan controllers are compact, variable phase angle regulators designed for precise control of motors, fans, and pumps in industrial and commercial environments.

Operating at **230V** for the **VAC2** models and **110V** for the **VAC1**, these controllers offer **0-98% adjustable voltage output**, ensuring smooth, reliable operation.

With robust **Triac inrush protection**, **RC Snubber technology**, and **EMC compliance**, they handle high inrush currents while meeting modern standards for electrical noise suppression.

TECHNICAL SPECIFICATIONS

	VAC1-1/RFI	VAC2-1/RFI	VAC2-3/RFI
Maximum RMS on-state current	1A	1A	3A
Peak one cycle surge @ 10ms	80A	80A	150A
I ² t for fusing	36 A ² s	36 A ² s	100 A ² s
Minimum operating current	100mA		
Isolation voltage	2500V rms		
Maximum recommended unit temperature	70°C		
Mains supply +/-10% @ 50/60Hz	110V ac	230V ac	230V ac
Output Range	0-98%		
Minimum Set Speed Range	0-98%		


YOU MUST READ THIS BEFORE INSTALLATION

 ELECTRICAL SAFETY	 INSTALLATION REQUIREMENTS	 USER RESTRICTIONS	 USAGE ENVIRONMENT	 HOT SURFACE WARNING
WARNING: RISK OF ELECTRIC SHOCK Always consult the Installation & Maintenance Instructions before connecting this product to the power supply. WARNING: Disconnect Power Before Servicing Ensure the electrical supply is safely disconnected before connecting to any supply, load, or control terminals.	WARNING: Installation by Qualified Personnel Only This product must only be installed or fitted by a competent, qualified installer familiar with the relevant electrical standards and installation practices.	WARNING: Not for Use by Vulnerable Individuals This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they are supervised or instructed by a person responsible for their safety.	WARNING: Industrial Use Only This is an industrial-grade product and is not intended for household use.	WARNING: Hot Surfaces On certain models, surfaces marked with this symbol become hot during use. Avoid direct contact and follow all thermal safety precautions.

VAC1/RFI & VAC2/RFI

Up to 3A, 110V, 230V Single Phase Fan Controller

➤ VAC2-3/RFI

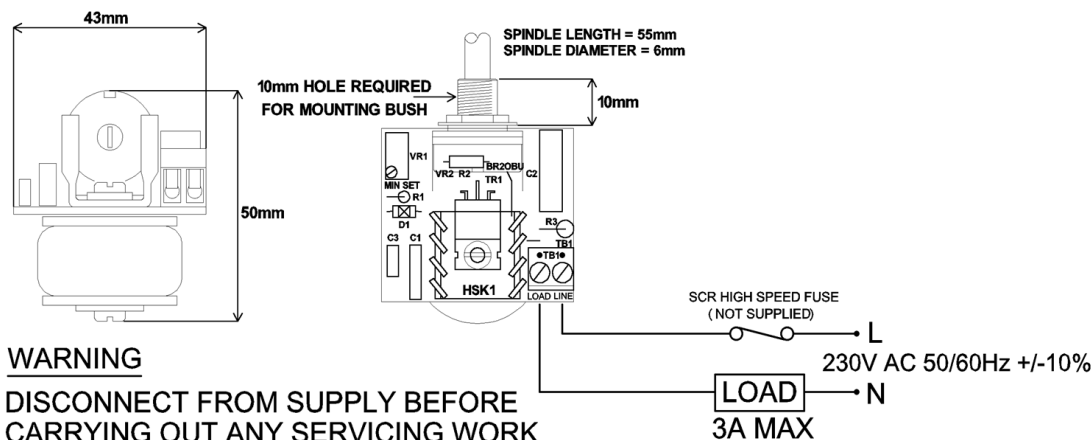

RECOMMENDATIONS

FUSING

It is recommended to use semiconductor (fast acting) type fuses or circuit breakers (Semiconductor - MCB) for unit protection. On initial 'switch on' some loads may need an increased Factor of Safety (F of S) for unit and/or device protection. (See the SRA Datasheet for further information).

DOCUMENTS

Other documents available on request, which may be appropriate for your application:

Code	Identity	Description
X10229	RFI	Filtering Recommendations: Addressing the EMC Directive
X10213	ITA	Interaction: Uses for phase angle and for burst fire control
X10255	SRA	Safety Requirements: Addressing the Low Voltage Directive (LVD) including Thermal Data/Cooling, Live Parts Warning, Earthing Requirements and Fusing Recommendations
P01.1	COS	UAL Conditions of Sale

It is recommended that installation and maintenance of this equipment should be done with reference to the current edition of the I.E.T. regulations (BS7671) by suitably qualified/trained personnel. The regulations contain important requirements regarding the safety of electrical equipment. For International standards refer STANDARDS on D of C.

PRODUCT CODE AND RELATED PRODUCT CODE

Product Code	Product Description
A71105	VAC1-1/RFI 1A, 110V Fan control with RFI
A72102	VAC2-1/RFI 1A, 230V Fan control with RFI
A72105	VAC2-1/RFI High Surge, 1A, 230V Fan control with RFI
A72301	VAC2-3/RFI 3A, 230V Fan control with RFI